

Purpose

It is applied to Connect street lighting that is overhead lines Powerem **AL**

Advantages

Unscrew before assembly does not cause fall to pieces

Tightening bolt is not live

Regularity of electric al connection achieved by shearing bolt.

Suitable for live working by insulating a tightening bolt from conductive materials.

Body made of polyamide Glass fiber reinforced. Casing made of polypropylene.

Technical data:

Rated voltage $U = 500V$

Aerial conductor cross-section 16-35 mm²

Branch conductor cross-section 2,5-4mm²

Tightening torque 10 NM (bolt head : 13)

Max. fuse current : 16 A

weight = 240 g

Photo product




Powiększ zdjęcie



Powiększ zdjęcie



Powiększ zdjęcie

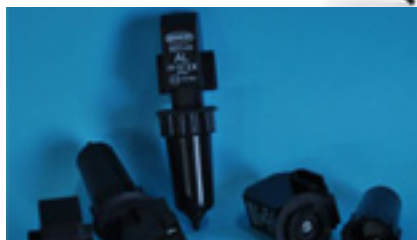

Powiększ zdjęcie

